

BASIN TAP

AQRE131


PROTRONIC-C battery-supplied washbasin tap with touch-free operation, DN 15 with aerator and integrated flow control, for connection to pre-mixed warm or cold water supply, polished chromium-plated brass, 6 V battery.

ARTICLE NUMBER

7612982085482

TECHNICAL DATA

Type of sensor	opto-electronic sensor
Type of tap	pillar tap
Material fitting	brass
Surface finish fitting	chromed
Gross weight	2.6 kg
Type of operation	sensor operation
Type of mounting	mounted on product
Functional principle	electronic self-closing
Default automatic hygiene flushing	not activated
Type of mixing	no mixing
Thermal disinfection	no
Sound insulation	no
Spout projection	95 mm
Diameter nominal	DN 15
Calculation flow rate cold water	0.100 liter per second
Default flow time	60 seconds
Minimum flow pressure	1.00 bar
Volume flow rate at 3 bar	0.100 liter per second
Depressurised	no
Protective system IP	IP67
Power supply connection	Battery 6 V
Protective shutdown	yes

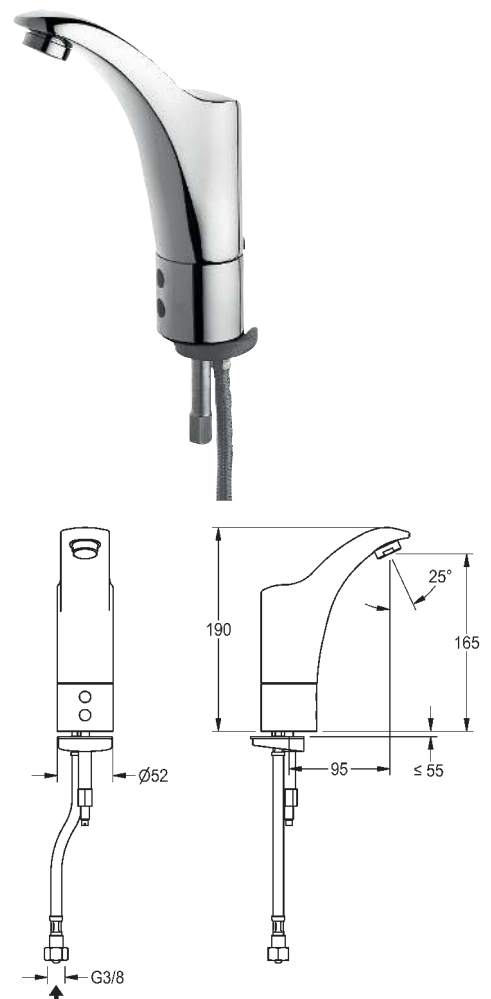

Franke Washroom Systems
ws-info.int@franke.com
www.franke.com

2014-12-09, Franke WS