


AS20333

ROVAL BENCH MOUNTED AUTOMATIC LIQUID SOAP DISPENSER

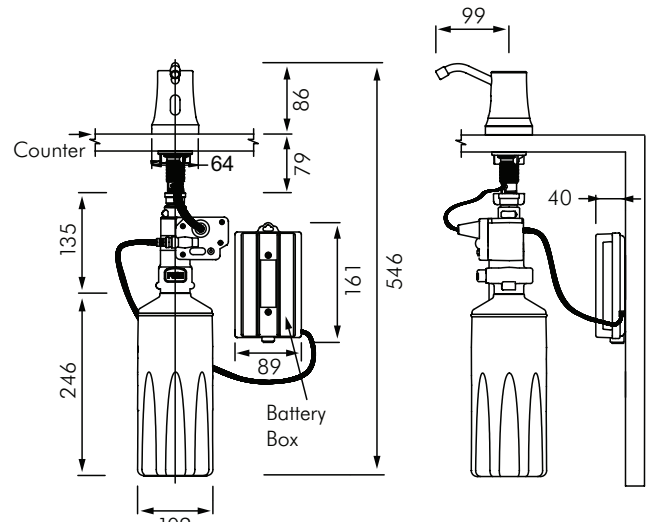

DESCRIPTION

The Roval Model 20333 automatic deck mounted soap dispenser holds 1.6L of liquid soap and dispenses in cycles of single shot volume of approximately 1.25ml. Operation is initiated by hands-free sensor controlled by microprocessor digital circuitry powered by four (4) D size 1.5 V batteries (supplied by others) in a screw-locked compartment located under counter. Unit has type 304 stainless steel alloy with a polished finish over all exposed surfaces. Dispenser has LED's to indicate function, battery condition and soap supply level on front face and mounts on a vanity deck through 25 diameter hole.

INSTALLATION

Mount spout and sensor housing to vanity with rubber washers and basin nut (supplied) through mounting hole in deck (by others). A 10mm high spacer is provided for installation with raised rim vanity basins. Mount battery compartment in convenient location under vanity deck with two (2) screws and wall anchors (supplied). Install four (4) D size 1.5 V cells (by others) in under-deck battery compartment according to polarity indication and screw

lock cover. Fill tank with appropriate viscosity soap to correct level and latch into port. Connect control and battery power cables plugs into control unit.

SOAP

Correct soap viscosity is vital to correct soap dispenser performance. Only vegetable based liquid soap with a viscosity of 4500 - 8000 centrepoise should be used. Never use commercial hand cleaners as these often have grit which could damage soap pump mechanisms. Suggested Soap - Easy Products Ltd - Liquid Soap.

MODEL

AS20333 - Standard model as shown.



**MACDONALD
INDUSTRIES LIMITED**

Auckland (Head Office)

20 Carr Rd, Three Kings

Auckland 1041

P: 09 624 1115

F: 09 624 1110

E: sales@macdonaldindustries.co.nz

Wellington

P: 04 569 8033

F: 04 569 8066

Christchurch

P: 03 348 2356

F: 03 348 2376

www.macdonaldindustries.co.nz