


DE379ENCB

BLACK BINOPTIC ELECTRONIC TAP

DELABIE

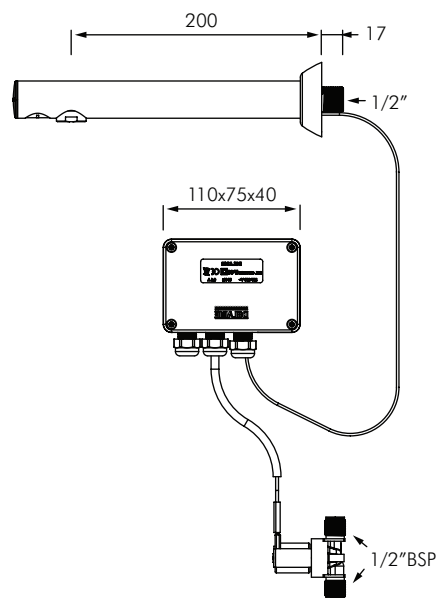

DESCRIPTION

Delabie DE379ENCB is a wall mounted matte black electronic basin tap with independent IP65 electronic control unit and shock-proof infrared presence detection sensor at the end of the spout. Available as 230/12V mains supply with transformer. Adjustable anti-bacterial duty flush operates for ~60 seconds every 24 hours after last use. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.4 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. L.200mm spout for wall mounting with hygienic scale-resistant flow straightener. Spout has a smooth interior and low volume of water (limits bacterial niches).

Supplied with M1/2" solenoid valve and filter.

Chrome-plated brass body with matte black chrome finish.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Wall mounted connection M1/2".
- Maximum Hot water temperature 55°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly on the flow straightener.
- Ensure basin waste position does not conflict with position of tap sensor. Minimum distance above basin top is 150mm.
- Conduit required in wall for sensor cable.
- Installation height is the greater of either;
 - 150mm above top edge of basin
 - 300mm above the bottom of the basin bowl.

MODELS

DE379ENCB - Standard model 3L/min
6 star WELS rating.



Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033