


DE702301 TEMPOSTOP 2 TIME FLOW BASIN TAP

DELABIE

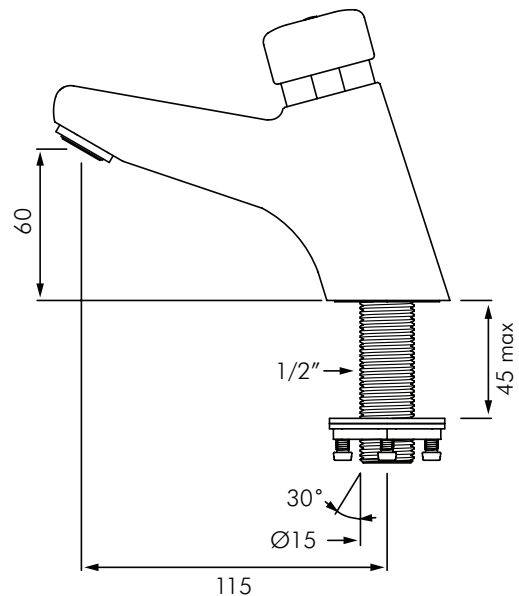

DESCRIPTION

DELABIE DE702301 is a deck mounted time flow basin tap with anti-blocking (AB) system. AB system allows water to flow only when the push button is released, preventing water wastage and flooding. Time flow is ~7 seconds. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with tamperproof scale-resistant flow straightener and M1/2" reinforced fixing.

Supplied with red and blue indicators.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Deck mounted through Ø22mm hole.
- M1/2" water supply connection.
- Reinforced fixing by tightening the 3 stainless screws on the brass back-nut.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly onto the screw head located under the coloured indicator.

MODELS

- DE702301** - Standard model 3L/min - 6 star WELS rating.
DE-SPACER - Bush used on basins with Ø34mm hole to centre tap in place.

