


**DE714700AS**  
 SPORTING 2 SHOWER PANEL  
 - LEAD FREE\*

**DELABIE**

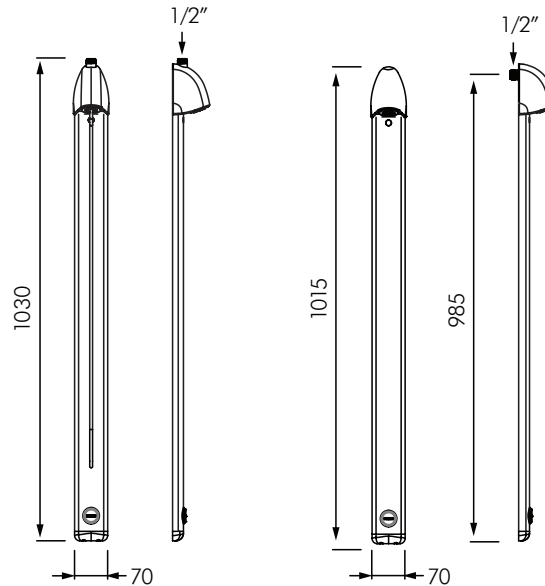

**DESCRIPTION**

Delabie DE714700AS is a time flow shower panel for surface mounting with soft touch operation. The water inlet can be from above or in the back, with integrated stopcock. Slimline structure with concealed fixings. Anodised aluminium panel with satin finish chrome-plated shower head, with rain-effect spray pattern. Time flow ~30 seconds. Flow rate 6L/min at 300kPa. Operating pressure 100-500kPa, 300kPa is recommended.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

**INSTALLATION**

- Surface mounted shower panel.
- Slimline structure with concealed fixings.
- Exceptional water savings ~80%.
- Soft-touch activation.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- M1/2" water connection.
- Flow rate pre-set at 6L/min, rain effect spray.
- Integrated non-return valve, filter, and stopcock.

**MODELS**

**DE714700AS** - Delabie Sporting 2 Time Flow Shower Panel.

\*'Lead free' has been defined as a plumbing product or material in contact with potable water that has a weighted average lead content of no more than 0.25%.



**Auckland (Head Office)**

20 Carr Rd, Three Kings  
 Auckland 1042  
 09 624 1115  
 sales@macdonaldindustries.co.nz  
 macdonaldindustries.co.nz

**Christchurch**

32B Hayton Road  
 Wigram, Christchurch  
 03 348 2356  
 christchurch@macdonaldindustries.co.nz

**Wellington**

04 569 8033