

POINT OF DISCHARGE MIXERS

PREMIX COMPACT

The Delabie Premix Compact is designed to provide stable mixed water to sanitary fittings within 5m of the point of discharge. Ideal for washbasins or troughs the Premix Compact is adjustable from 30°C - 60°C and is lockable by the installer to prevent unwarranted adjustment. Ideal range 35 - 45°C ± 1°C

- Anti-scald security, automatic shut off in case of cold water failure
- Integrated check valves
- Available in 1/2" and 3/4" BSP sizes
- Available in rough brass (chromed) or polished chrome finishes
- Strainers included




DE733015



DE733021

Description	Product Code
1/2" BSP for 1 - 2 taps	
rough cast c/p	DE733 015
polished c/p	DE733 016
3/4" BSP for 1 - 5 taps	
rough cast c/p	DE733 020
polished c/p	DE733 021

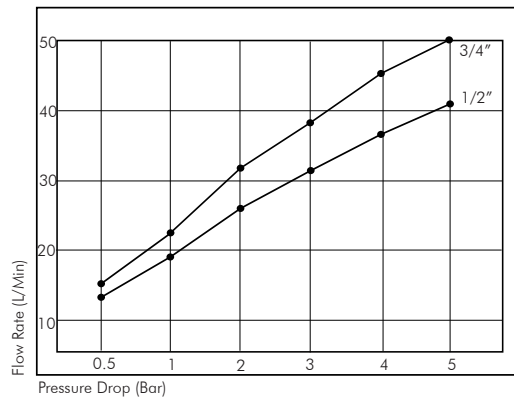

Specifications

Max Inlet Temp:

- HW - 85°C
- CW - 20°C

Min. Temp Differential:
- 15°C

Pressure range:

- 1 to 5 Bar

Pressure Differential:

- 1 Bar Max

Flow Rates with 1Bar pressure drop:

- 1/2" size - 19l/min
- 3/4" size - 23l/min

Valve adjustable from 30 - 60°C

Valve supplied c/w check valves.

Always install with inlet isolators to enable servicing

