


DE741510AS
TEMPOSOFT 2
TIME FLOW BIB TAP - LEAD FREE*

DELABIE

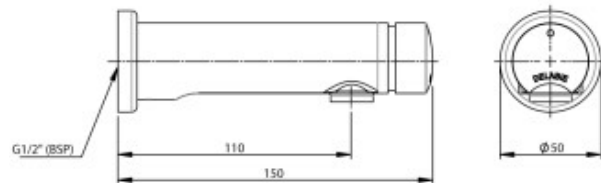

DESCRIPTION

Delabie DE741510AS is a wall mounted time flow basin tap with a soft-touch operation. Soft-touch operation allows users to press the control to open the tap with no effort, especially for children, elderly, or people with reduced physical ability. Time flow is ~7 seconds. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 3-6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with tamperproof scale-resistant flow straightener and M1/2" connection. Comes with wall mounting adapter to be fitted at wall finishing, tap then mounts with grub screw fixing.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Wall mounted connection M1/2".
- Exceptional water savings ~85%.
- Soft-touch activation.
- Spout length L.110mm.
- For cold or tempered single water supply.
- Maximum hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, adjustable.
- Supplied with red and blue indicators

MODEL

- DE741510AS** - DE741510AS – Delabie Temposoft 2 Time Flow Bib Tap With Spout L.110mm
DE741550LF - DE741510AS – Delabie Temposoft 2 Time Flow Bib Tap With Spout L.150mm.

*'Lead free' has been defined as a plumbing product or material in contact with potable water that has a weighted average lead content of no more than 0.25%.

