


DE745107AS

TEMPOSTOP TIME FLOW BASIN TAP - LEAD FREE*

DELABIE

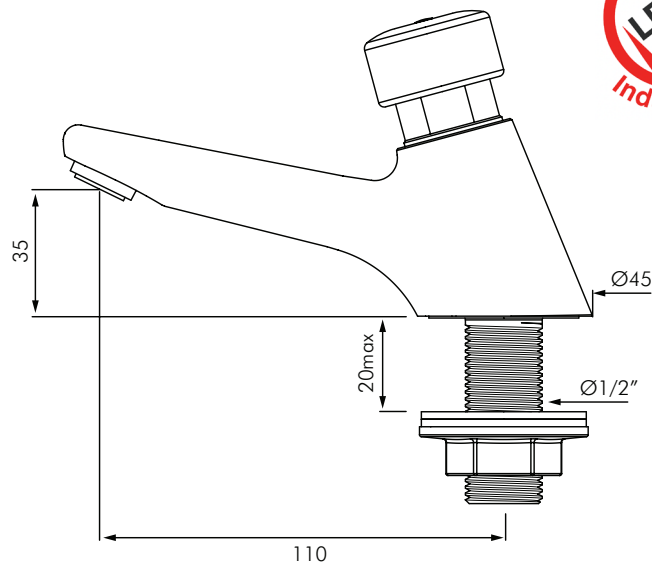

DESCRIPTION

DELABIE DE745107AS is a deck mounted time flow basin tap. Time flow is ~7 seconds. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with tamperproof scale-resistant flow straightener and M1/2" standard fixing.

Supplied with red and blue indicators.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Deck mounted through Ø22mm hole.
- M1/2" water supply connection.
- Fixing by tightening the back-nut.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly onto the screw head located under the coloured indicator.

MODELS

DE745107AS - Standard model 3L/min - 6 star WELS rating.

DE745301LF - Same as DE745107AS but has anti-blocking feature and reinforced fixing.

DE-SPACER - Bush used on basins with Ø34mm hole to centre tap in place.



Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033