


DE745440
TEMPOSTOP
TIME FLOW BASIN TAP LEVER OPERATED

DELABIE

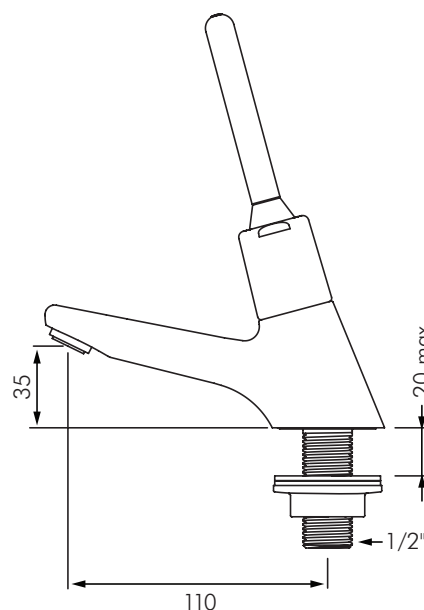

DESCRIPTION

DELABIE DE745440 is a deck mounted time flow basin tap with lever operation. Lever operation allows users to operate the controls with no effort especially elderly or people with reduced physical ability. Time flow is ~7 seconds. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with tamper proof scale-resistant flow straightener and M1/2" fixing.

Supplied with red and blue indicators.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

Note: Not recommended for use in early childhood facilities. Refer instead to Temposoft DE741500 or DE74100.

INSTALLATION

- Deck mounted through Ø22mm hole.
- M1/2" water supply connection.
- Fixing by tightening the back-nut.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly onto the screw head located under the lever cover.

MODELS

DE745440 - Standard model 3L/min - 6 star WELS rating.

DE-SPACER - Bush used on basins with Ø34mm hole to centre tap in place.



Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033