


**DE746000**  
TEMPOSTOP  
TIME FLOW BIB TAP

**DELABIE**

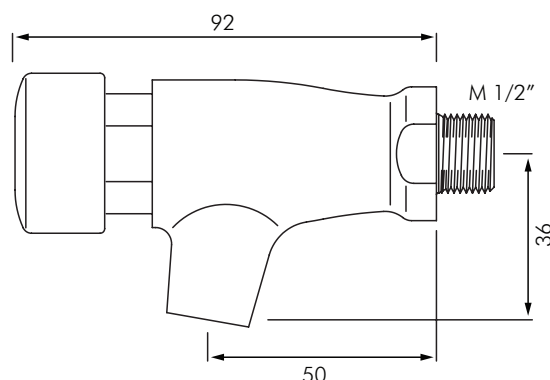

**DESCRIPTION**

DELABIE DE746000 is a wall mounted time flow basin tap. Time flow is ~7 seconds. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with tamperproof scale-resistant flow straightener and M1/2" fixing.

Supplied with red and blue indicators.

Also available with anti-blocking (AB) system that allows water to flow only when the push button is released, preventing water wastage and flooding (see Models).

We recommend installing a thermostatic mixing valve (see Water Tempering section).

**INSTALLATION**

- Wall mounted connection M1/2".
- M1/2" water supply connection.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly onto the screw head located under the coloured indicator.

**MODELS**

- DE746000** - Standard model 3L/min - 6 star WELS rating.
- DE746001** - Same as DE746000 but has anti-blocking feature - 6 star WELS rating.
- DE746292** - Same as DE746000 but with wall plate for tap 1/2" Ø60mm - 6 star WELS rating.
- DE822516** - Extension MF1/2" L.50mm.
- DE292015** - Wall plate for tap 1/2" Ø60mm.



**Auckland (Head Office)**

20 Carr Rd, Three Kings  
Auckland 1042  
09 624 1115  
sales@macdonaldindustries.co.nz  
macdonaldindustries.co.nz

**Christchurch**

32B Hayton Road  
Wigram, Christchurch  
03 348 2356  
christchurch@macdonaldindustries.co.nz

**Wellington**

04 569 8033