
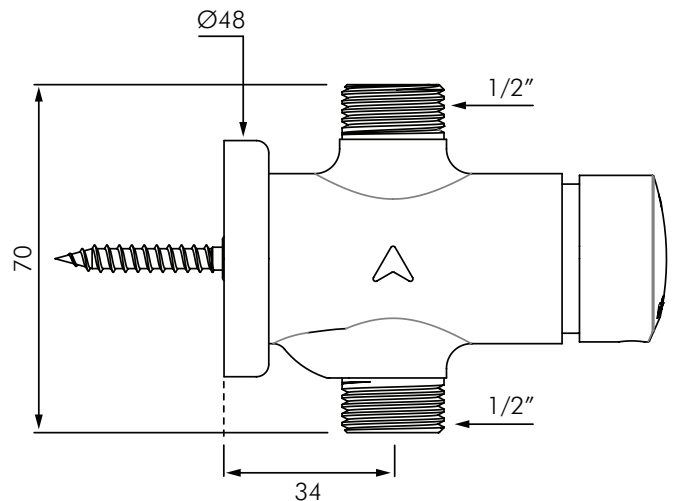


DE747800
TEMPOSOFT 2
SURFACE MOUNTED SHOWER VALVE

DELABIE

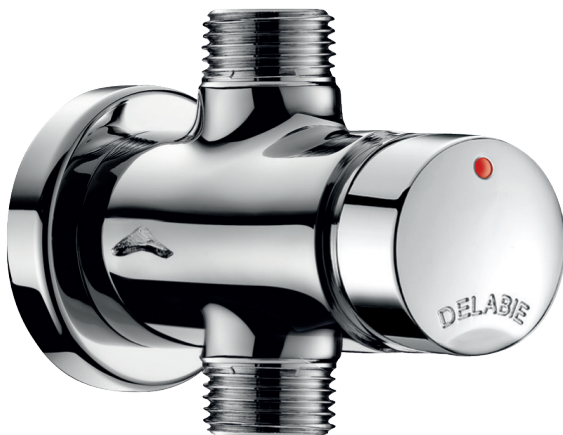

DESCRIPTION

DELABIE DE747800 is a surface mounted time flow shower valve with a soft touch operation. Soft touch operation allows users to press the control with no effort especially children, elderly or people with reduced physical ability. Time flow is ~30 seconds. Flow rate is pre-set at 9L/min at 300kPa, can be adjusted. When connected to a Delabie shower rose the actual flow rate will be 6L/min, 3 star WELS rating. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome plated solid brass body with straight inline inlet and outlet M1/2" connections for mixed water supply.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Surface mounted with M1/2" water supply connections.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 9L/min at 300kPa, can be adjusted.

MODELS

DE747800 - Standard model 9L/min - 2 star WELS rating.



**MACDONALD
INDUSTRIES LIMITED**

Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1041
P: 09 624 1115
F: 09 624 1110
E: sales@macdonaldindustries.co.nz

Wellington

P: 04 569 8033
F: 04 569 8066

Christchurch

P: 03 348 2356
F: 03 348 2376