


# DE749000 TIME DELAY HIGH FLOW SHOWER VALVE

# DELABIE

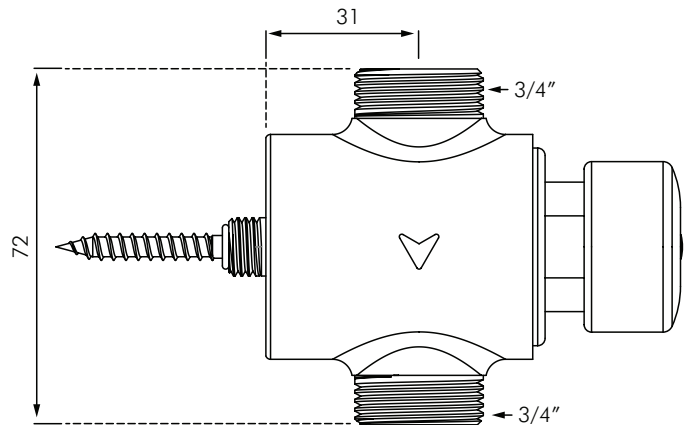

## DESCRIPTION

DELABIE DE749000 is a time flow shower valve for surface mounting. Time flow is ~30 seconds. Flow rate is pre-set at 75L/min at 300kPa without flow regulator. When connected to a Delabie shower rose the actual flow rate will be 10L/min, 2 star WELS rating. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome plated solid brass body and Ø70mm cover plate. M3/4" water connections for mixed water supply.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

## INSTALLATION

- Surface mounted with M3/4" water supply connections.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Pre-set flow rate at 75L/min at 300kPa without flow regulator.

## MODELS

- DE749000** - Standard model as shown.
- DE749700** - Same as DE749000 but with 12L/min flow rate - 2 star rating.

