


DE749218 + DE749BOX

TEMPOSTOP TIME FLOW SHOWER VALVE

DELABIE

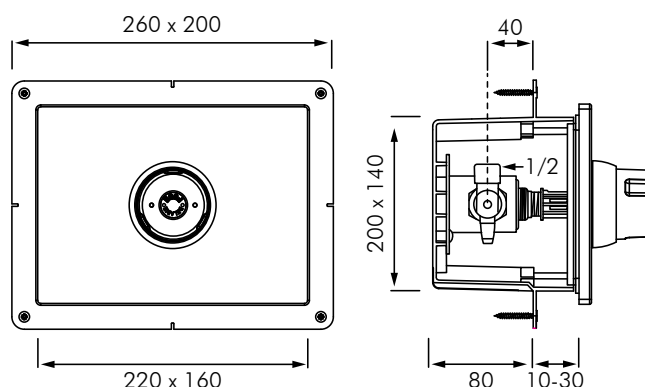

DESCRIPTION

DELABIE DE749218-749BOX is a recessed time flow shower valve with waterproof recessing housing. Time flow is ~30 seconds with soft touch operation. Soft touch operation allows users to use the controls with no effort especially children, elderly or people with reduced physical ability. Flow rate is pre-set at 12L/min at 300kPa, can be adjusted. When connected with a Delabie shower head the actual flow rate will be 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated control with tamperproof polished stainless steel wall plate 160x220mm and recessed waterproof installation box for 90mm wall cavity. Waterproof installation box prevents water ingress behind the wall lining and is adjustable for all types of wall finishes.

Supplied with filter and M1/2" stopcock.

INSTALLATION

- **IMPORTANT:** Must install DE749BOX prior to wall lining.
- Wall plate adjustable 10-30mm.
- Concealed fixings, stopcock M1/2" behind cover plate.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Maximum HW CW pressure differential 15%.
- Flow rate pre-set at 12L/min at 300kPa, actual flow rate is determined by shower head installed.
- Operating pressure 100-500kPa, 300kPa recommended.

MODELS

DE749218 - Standard model 12L/min - 2 star WELS rating.

DE749BOX - Waterproofing installation box.



Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033