


# DE749628

## TEMPOSTOP

### TIME FLOW SHOWER VALVE

# DELABIE

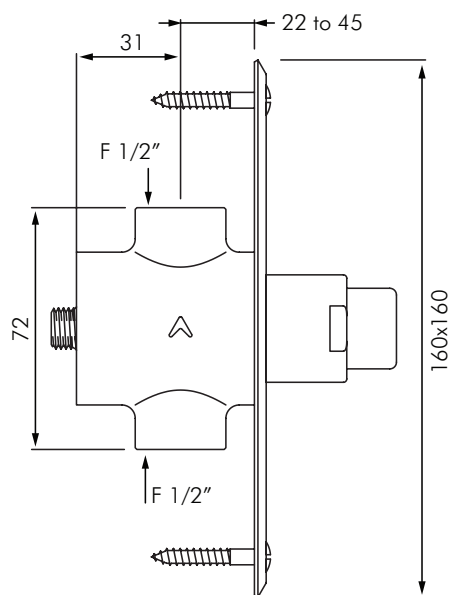

### DESCRIPTION

DELABIE DE749628 is a recessed mounted time flow shower valve. Time flow is ~30 seconds. Flow rate is pre-set at 12L/min at 300kPa, can be adjusted. When connected to a Delabie shower rose the actual flow rate will be 6L/min, 3 star WELS rating. Operating pressure is 100-500kPa, 300kPa is recommended. Bright polished stainless steel wall plate 160x160mm with solid brass body. Recessing depth can be adjusted between 25-40mm. F1/2" water connections for mixed water supply.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

### INSTALLATION

- Recessed mounted behind 160x160mm stainless steel cover plate.
- F1/2" water supply connection.
- Recessed depth can be adjusted from 25 to 40mm.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 12L/min at 300kPa, can be adjusted.

### MODELS

**DE749628** - Standard model 12L/min - 2 star WELS rating.