


DE749628-AL

ANTI LIGATURE TIME FLOW SHOWER VALVE

DELABIE

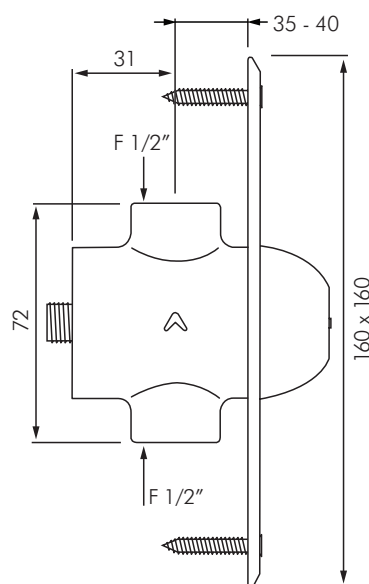

DESCRIPTION

DELABIE DE749628-AL is a recessed mounted time flow shower valve with anti-ligature protection. Time flow is ~30 seconds. Flow rate is pre-set at 12L/min at 300kPa, can be adjusted. When connected to a Delabie shower rose the actual flow rate will be 6L/min, 3 star WELS rating. Operating pressure is 100-500kPa, 300kPa is recommended. Bright polished stainless steel wall plate 160x160mm fixed by 4x Torx stainless steel security fixings with solid brass body. F1/2" water connections for mixed water supply.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Anti-ligature button surround for protection.
- Recessed mounted behind 160x160mm stainless steel cover plate fixed by 4x Torx security screws.
- F1/2" water supply connection.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 12L/min at 300kPa, can be adjusted.

MODELS

DE749628-AL - Standard model 12L/min - 2 star WELS rating.