


DE749770
TEMPOSTOP
TIME FLOW SHOWER VALVE FOR PANEL

DELABIE

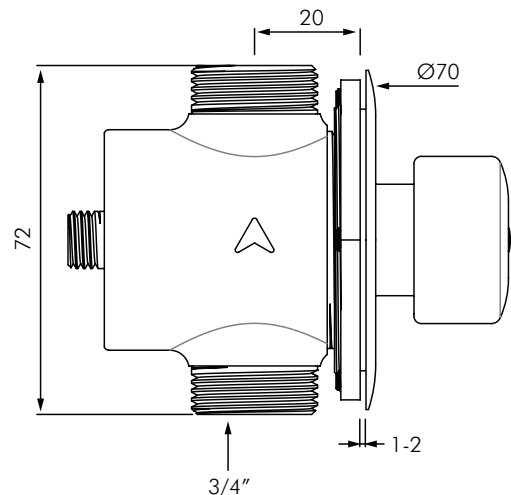

DESCRIPTION

DELABIE DE749770 is a time flow shower valve for panel mounting. Time flow is ~30 seconds. Flow rate is pre-set at 12L/min at 300kPa, can be adjusted. When connected to a Delabie shower rose the actual flow rate will be 6L/min, 3 star WELS rating. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome plated solid brass body and Ø70mm cover plate. Panel mounting 2mm maximum. F1/2" water connections for mixed water supply.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- For panel mounting 2mm maximum.
- F1/2" water supply connection.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 12L/min at 300kPa, can be adjusted.

MODELS

DE749770 - Standard model 12L/min - 2 star WELS rating.