
DE777200 TEMPOSTOP THROUGH WALL TIME FLOW URINAL VALVE





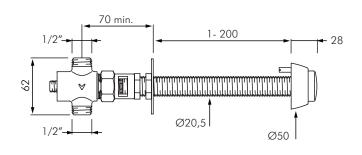

DESCRIPTION

DELABIE DE777200 is a through wall time flow urinal valve and can be cut to size <200mm. Time flow is \sim 3 seconds. Flow rate is pre-set at 0.15L/second at 300kPa, can be adjusted. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome plated solid brass body. Control base plate has an anti-rotating pin to lock in place. M1/2" water connections for water supply.

Suitable for use on all our back inlet wall hung urinals.

INSTALLATION

- For through wall control up to 200mm thick.
- M1/2" BSP water supply connections.
- Pre-set to 0.15L/flush complying with a 6 star WELS rating.
- Flow is adjustable on installation.
- Operating pressure 100-500kPa, we recommend 300kPa.

MODELS

DE777200 - Standard model as shown - 6 star WELS rating.





Auckland (Head Office)

20 Carr Rd, Three Kings Auckland 1041 P: 09 624 1115 **F**: 09 624 1110

E: sales@macdonaldindustries.co.nz

Wellington

P: 04 569 8033

Christchurch

P: 03 348 2356 **F**: 04 569 8066 **F**: 03 348 2376