


DE778700

TEMPOFLUX VALVE

SATIN STAINLESS STEEL FINISH

DELABIE

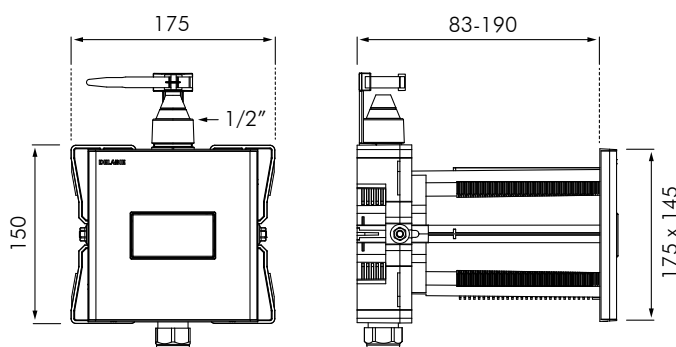

DESCRIPTION

Waterproof recessed time flow valve for individual urinals. Satin finish stainless steel wall plate 145 x 145mm with chrome-plated metal push-button.

Waterproof recessing housing:

- Collar with waterproof seal.
- Hydraulic connection to the outside and maintenance from the front.
- Adjusts to all types of installation (rails, solid walls, panels).
- Compatible with wall finishes from 10 - 120mm (while maintaining the minimum recessing depth of 83mm).
- Suitable for standard or "pipe-in-pipe" supply.
- Stopcock and flow rate adjustment, filter and cartridge all integrated and accessible from the front.
- TEMPOFLUX F1/2" flush valve is compatible with sea water and grey water.
- Supplied in 2 kits: inwall waterproof box, and push panel finishing kit.

Soft-touch operation.

10-year warranty.

INSTALLATION

- Time flow pre-set at ~3 seconds, can be adjusted from 3 - 7 seconds (patented).
- Flow rate pre-set at 0.15 l/sec at 3 bar, can be adjusted up to 0.3 L/sec.
- Connection with Ø35mm connection washer (for standard urinals) or can use 1/2" brass connection (for urinals supplied by flexible).
- Neck tube refer DE752430 or DE757430.

MODELS

DE778BOX-778700 - Standard model shown

