
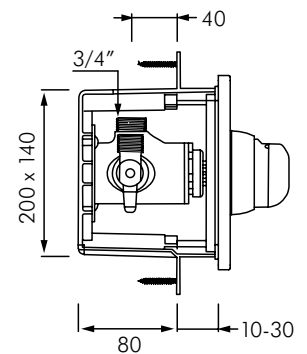


DE790218 + DE790BOX
 TEMPOMIX
 CONCEALED SHOWER MIXER

DELABIE

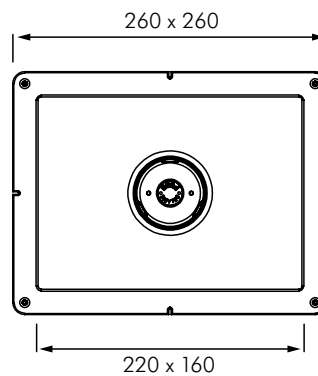

DESCRIPTION

DELABIE DE790218-790BOX is a recessed time flow shower mixer with soft touch operation and recessed waterproof installation box. Soft touch operation allows users to use the controls with no effort especially children, elderly or people with reduced physical ability. Temperature control and operation on the push button with adjustable maximum temperature limiter. Time flow is ~30 seconds. Flow rate is pre-set at 12L/min at 300kPa, but when connected with a Delabie shower head the actual flow rate will be 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated control with tamperproof polished stainless steel wall plate 160x220mm and recessed waterproof installation box for 90mm wall cavity. Waterproof installation box prevents water ingress behind the wall lining and is adjustable for all types of wall finishes.

Supplied with filters, non-return valves and M1/2" stopcocks.

INSTALLATION

- **IMPORTANT:** Must install DE790BOX prior to wall lining.
- Wall plate adjustable 10-30mm.
- Concealed fixings, stopcocks M1/2" behind cover plate.
- Maximum Hot water temperature 55°C.
- Maximum HW CW pressure differential 15%.
- Flow rate pre-set at 12L/min at 300kPa, actual flow rate is determined by shower head installed.
- Operating pressure 100-500kPa, 300kPa recommended.

MODELS

- DE790218** - Standard model 12L/min
 2 star WELS rating
- DE790BOX** - Waterproofing installation box