


# DE790425LF

TEMPOMIX

TIME FLOW SHOWER MIXER - LEAD FREE\*

# DELABIE

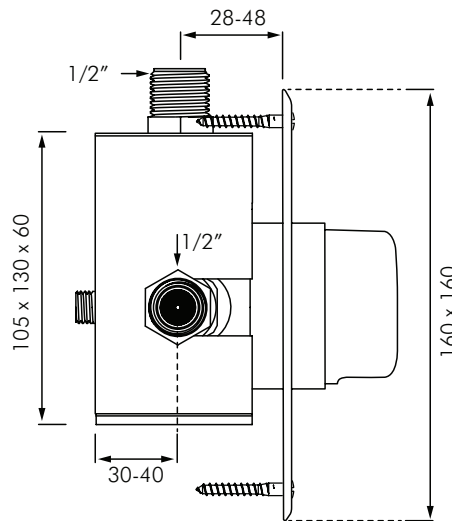

## DESCRIPTION

Delabie DE790425LF is a recessed time flow shower mixer with soft-touch operation. Soft-touch operation allows users to press the control to open the tap with no effort, especially for children, elderly, or people with reduced physical ability. Supplied with stainless steel wall plate 160x160mm. Temperature control and operation is on the push button. Time flow is ~30 seconds. Flow rate is pre-set at 12L/min at 300kPa, final flow is determined by the shower head. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with scale-resistant flow straightener and M1/2" connections.

## INSTALLATION

- Recessed time flow shower mixer.
- steel wall plate 160x160mm.
- Recessing depth adjustable from 28-48mm.
- Soft-touch activation.
- Maximum HW inlet temperature 70°C, we recommend ≤45°C to avoid scalding.
- M1/2" water connections.
- Flow rate pre-set at 12L/min at 300kPa, see shower roses for final flow rate.
- Integrated non-return valves and filters.

## MODELS

**DE790425LF** - Delabie Tempomix Time Flow Shower Mixer, With Square Wall Plate.

\*'Lead free' has been defined as a plumbing product or material in contact with potable water that has a weighted average lead content of no more than 0.25%.



### Auckland (Head Office)

20 Carr Rd, Three Kings  
 Auckland 1042  
 09 624 1115  
 sales@macdonaldindustries.co.nz  
 macdonaldindustries.co.nz

### Christchurch

32B Hayton Road  
 Wigram, Christchurch  
 03 348 2356  
 christchurch@macdonaldindustries.co.nz

### Wellington

04 569 8033