


DE790925AS

TEMPOMIX CONCEALED SHOWER MIXER
- LEAD FREE*

DELABIE

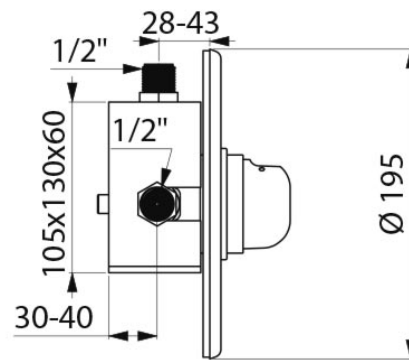

DESCRIPTION

Delabie DE790925AS is a recessed time flow shower mixer with soft-touch operation. Soft-touch operation allows users to press the control to open the tap with no effort, especially for children, elderly, or people with reduced physical ability. Supplied with round Ø195mm chrome-plated wall plate. Temperature control and operation is on the push button. Time flow is ~30 seconds. Flow rate is pre-set at 12L/min at 300kPa, final flow is determined by the shower head. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated metal control with M1/2" connections.

INSTALLATION

- Recessed time flow shower mixer.
- Chrome plated Ø195mm wall plate.
- Recessing depth adjustable from 28-43mm.
- Soft-touch activation.
- Maximum HW inlet temperature 70°C, we recommend ≤45°C to avoid scalding.
- M1/2" water connections.
- Flow rate pre-set at 12L/min at 300kPa, see shower roses for final flow rate.
- Integrated non-return valves and filters.

MODELS

DE790925AS - Delabie Tempomix Time Flow Shower Mixer, With Round Wall Plate.

*'Lead free' has been defined as a plumbing product or material in contact with potable water that has a weighted average lead content of no more than 0.25%.



Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch 8042
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033