
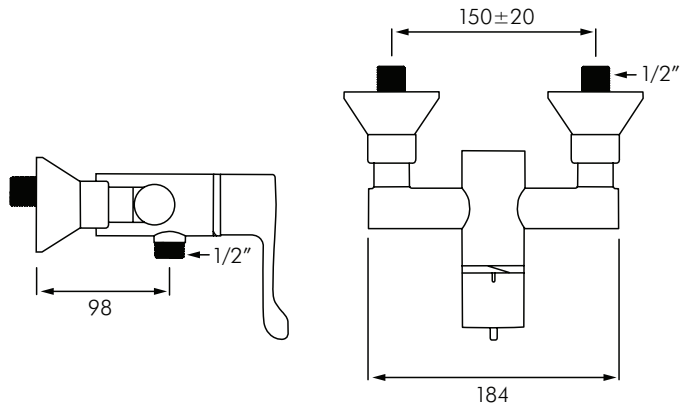


DEH9630

SECURITHERM

THERMOSTATIC SHOWER MIXER

DELABIE

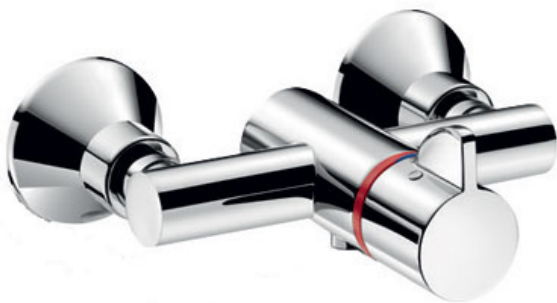

DESCRIPTION

DELABIE Securitherm DEH9630 is a wall mounted thermostatic single control shower mixer with smooth interior surfaces. Securitherm thermostatic mixer taps ensures immediate hot water shut off if the cold water supply fails. If the hot water fails the mixer also shuts off. Securitouch thermal insulation prevents burns to the user. Mixers with smooth interiors have 14x less Biofilm contamination than mixers with standard rough interiors. Flow rate limited to 8L/min at 300kPa, 6L/min with shower head. Bottom M1/2" outlet. Operating pressure is 100-500kPa, 300kPa is recommended. Easy to use hygienic control lever L.100mm. Temperature is limited to 39°C but is adjustable by the installer to the buildings' required maximum temperature.

Supplied with 2x M1/2" offset stop/purge wall connectors.

INSTALLATION

- Wall mounted 150 centres +/-20mm with M1/2" offset stop/purge wall connectors.
- Flow rate limited to 8L/min at 300kPa.
- Anti-scalding failsafe, Hot water shuts off immediately if cold water fails.
- Temperature limit set to maximum 39°C (is adjustable by installer).
- Minimum 15°C difference between HW and MW.
- Maximum 15% pressure differential between HW and CW.
- Thermal shocks are possible with this mixer tap.

MODELS

DEH9630 - Shower mixer 9L/min - 2 star WELS rating.