


FRFM2

STAINLESS STEEL FLOOR MOUNTED WC PAN - FACE WALL FIXED

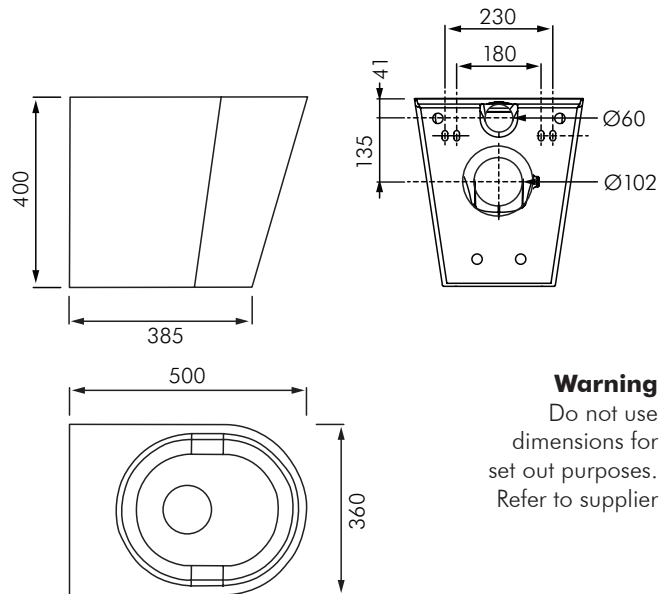

Warning
 Do not use dimensions for set out purposes. Refer to supplier

DESCRIPTION

Franke floor mounted back to wall stainless steel WCs are built for installation in areas where vandalism is likely to cause damage to ceramic WCs. Fabricated in 1.6mm Type 304 stainless steel with a satin finish, these are available with or without seats or alternatively with seat pads fitted.

- Flush with 6L of water
- They are 3 Star WELS rated when installed with a similarly rated flushing device

INSTALLATION

The Franke FRFM2 floor mounted P-Trap WC is designed for face wall mounting, using a press-fit mounting bracket to secure it to the wall. It is suitable for use with inwall cisterns, such as the single flush WISA WS300VPAP and the WS2104-VP which has vandal resistant stainless steel buttons and front access for servicing. Alternatively Zurn ZH6152XL or ZDF6152XL flush valves can be used with ZA access panels.

Where a high degree of security is required and there is a plumbing duct directly behind WC, use through wall bolted FRFM1 WCs and Warden electronic flushing controls - refer separate literature.



MODELS

FRFM2 - Floor mounted face wall fixed WC



OPTIONS:

- FRSP** - grey plastic seat pads
- FRSW-FR2** - white plastic seat and flap
- FRSB-FR2** - black plastic seat and flap
- FRSW-FR1** - white plastic seat only
- FRSB-FR1** - black plastic seat only

FRFM2 - WITH ACCESSIBLE DUCT

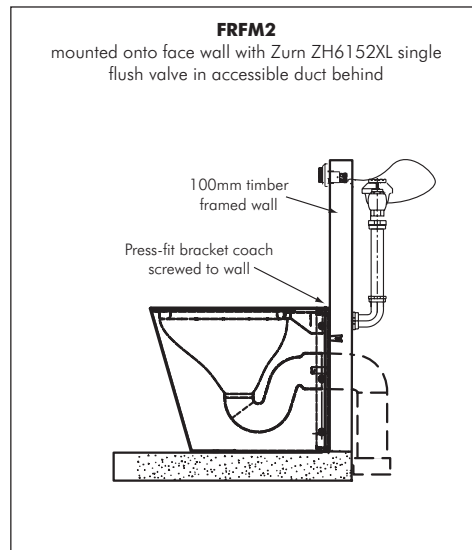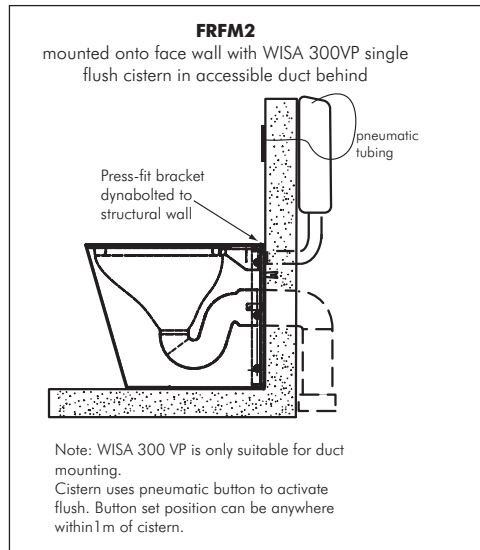

FRFM2 - NO DUCT

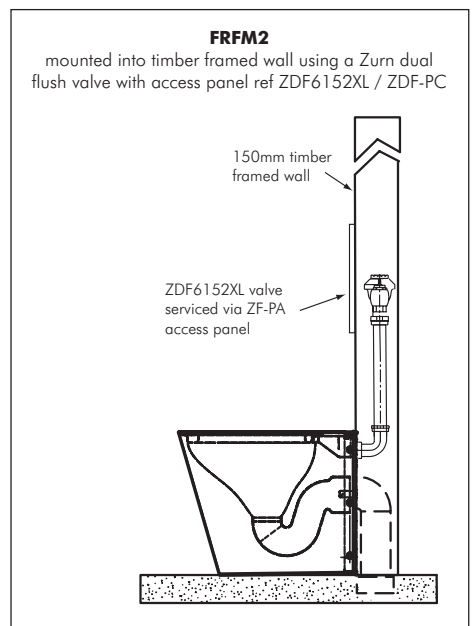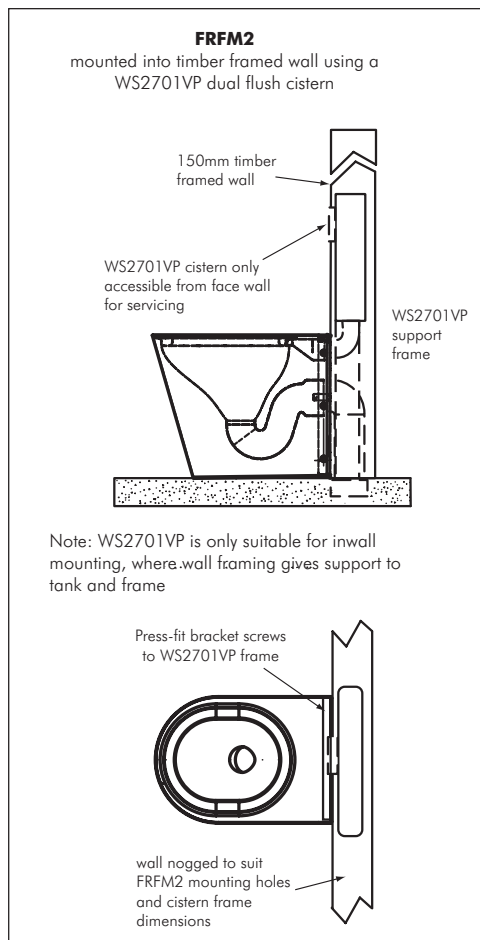

FRFM2 INSTALLATION GUIDES

Notes:

- These drawings are provided as possible ways of installing FRFM2 WCs and they should not be regarded as final or dimensionally accurate. For details on flushing options shown, refer to each products Technical Data Sheet
- Should a seat be required, all flush mechanisms should be installed in such a position that they avoid the seat lid