


MS-749..

THROUGH WALL TIMED FLOW SHOWER CONTROL VALVE - TO SUIT HIGH SECURITY SHOWERS

DELABIE



MS-749...

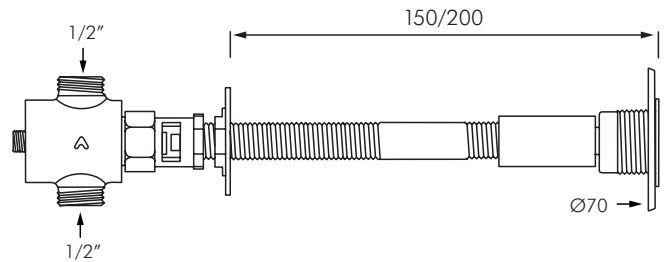

DESCRIPTION

The MacDonal MS-749.. is a through wall timed flow shower control for vandal resistant or anti-ligature applications and is designed to be installed where there is an accessible duct directly behind the shower. Timed flow showers are available to suit pre-mixed water and will flow for ~25 seconds run time with each press of the button. Suitable for use in security or high risk buildings such as prisons and mental health facilities.

- The valve set is supplied with a 75mm dia. escutcheon plate.
- Pressing the valve button initiates immediate water flow.
- On release of button water will stop flowing after ~25 seconds.

For a longer shower run-times please refer to our Warden electronic shower controls.

INSTALLATION

- 1/2" BSP supply connection.
- Where required, mixed water is recommended to be tempered to ~40°C using a quality thermostatic mixing valve such as the Wilkins W19-1070.
- Available in two sizes to suit walls either ≤150mm or ≤200mm thick.
- To complete the shower use one of our Delabie or Franke shower heads.

MODELS

MS-749-115 - To suit walls ≤150mm

MS-749-120 - To suit walls ≤200mm



**MACDONALD
INDUSTRIES LIMITED**

Auckland (Head Office)

20 Carr Rd, Three Kings

Auckland 1041

P: 09 624 1115

F: 09 624 1110

E: sales@macdonaldindustries.co.nz

Wellington

P: 04 569 8033

F: 04 569 8066

Christchurch

P: 03 348 2356

F: 03 348 2376

www.macdonaldindustries.co.nz