
FLUSHING VALVES

There are many varieties of flushing valves and those listed below are examples of those offered by MacDonald Industries Ltd, suitable for use with the Phoenix urinals. For details on each type refer appropriate Tech Data Sheet.

RA-PH3100

Delabie exposed chrome plated timed flow flush valves:

- DE479 407** - Tempomatic 4 sensor activated flush valve, screws into wingback. Automatically flushes urinal after use. Battery powered, 1L flush adjustable.
- DE778 755** - Tempoflux flush valve, screws into wingback. Complete with connecting pipe and inlet connector. 1L flush, adjustable.
- DE778 800** - Temposoft flush valve, screws into wingback. Requires additional DE752 000 connecting pipe and inlet connector. 1L flush adjustable.

RA-PH3200

Delabie recess mounted timed flow flush valves. Connection from valve to inlet connector by plumber:

- DE777 130** - Temposoft flush valve with 130dia escutcheon plate. 1L flush adjustable 7 second flush.
- DE779 128** - Tempostop flush valve with 130dia escutcheon plate. min 1.7L flush adjustable.

RAK recess mounted electronic flush valve:

- RA-FS10-6V** - Sensor activate flush valve, battery powered. Automatically flushes urinal after use. 1L adjustable.
- RA-FS10-230V** - As above but with 230V/6V power supply. 230V electrical connection by electrician.



**MACDONALD
INDUSTRIES LIMITED**

Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
www.macdonaldindustries.co.nz

Christchurch

03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington


04 569 8033

RA-PH3100 & RA-PH3200 PHOENIX WALL HUNG URINALS


RAK
CERAMICS

RA-PH3100

Reduce dimensions
by 200mm for a
child installation.

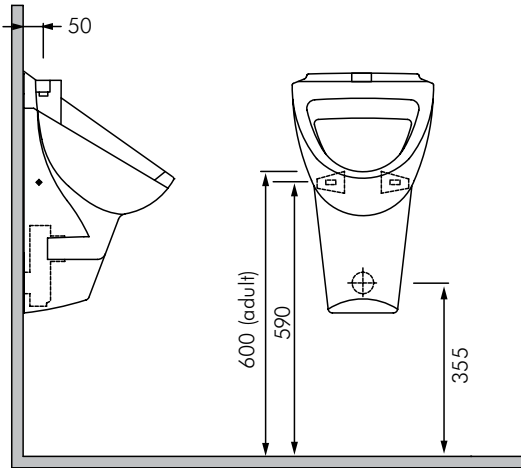

RA-PH3200

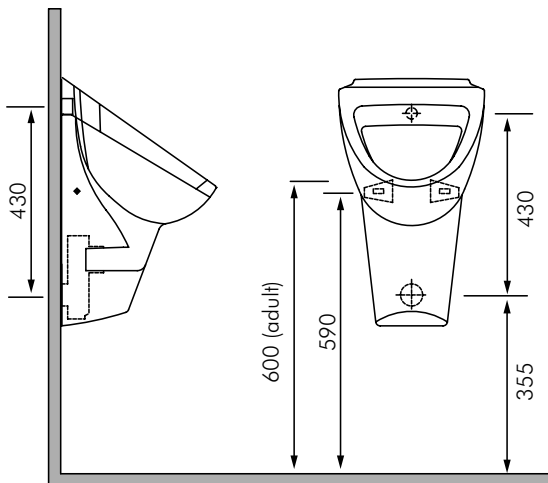

PRE LINING

Ideal pressure range 100 - 500kPa

Pipe up to urinals according to the drawings (pg 1) to suit the model of Phoenix urinal supplied and to suit the flushing system specified. Dimensions shown are based on urinal being installed for adults, adjust height dimensions if urinal is lowered for children (nominal 200mm).

Walls should be nogged to suit fixing bracket positions shown.

Carefully check what each urinal flush valve is supplied with as this can vary from product to product.

Waste trap supplied with each urinal requires a **50mm PVC socket** be fitted flush with the wall in the outlet position shown.

Water inlet connection requires a rubber Kee Seal connector with a 1/2" BSP connection.


Rear inlet urinals (Model RA-PH3200) are supplied with a proprietary inlet connector. Where appropriate, these should be screwed into a 1/2" wingback in the wall leaving the keeseal protruding from the wall no less than 15mm. Piping from recessed flush valve to wingback is plumbers care.

Top inlet urinal (Model RA-PH3100) connectors are supplied by the flush valve supplier as part of their kit. See over page for options on MacDonald flush valves and connection pipes.

POST LINING

Fix wall mounting brackets to wall in required position.

Back inlet urinals will require inlet connector to be screwed into wingback, protruding no more than 15mm from finished face wall.



Waste trap is supplied with a rubber keeseal which must be fitted to outlet of trap. Fit waste trap to outlet of urinal and present urinal back to wall, pushing the waste outlet into the 50mm PVC socket. Some trimming of waste outlet pipe may be necessary to achieve correct fit.

Once all connections have been made and flushing valve is working correctly, apply bead of white silicon around urinal to achieve seal to wall.