


WS7790PO

WISA INWALL CISTERN & DELABIE BASIN VALVE SET

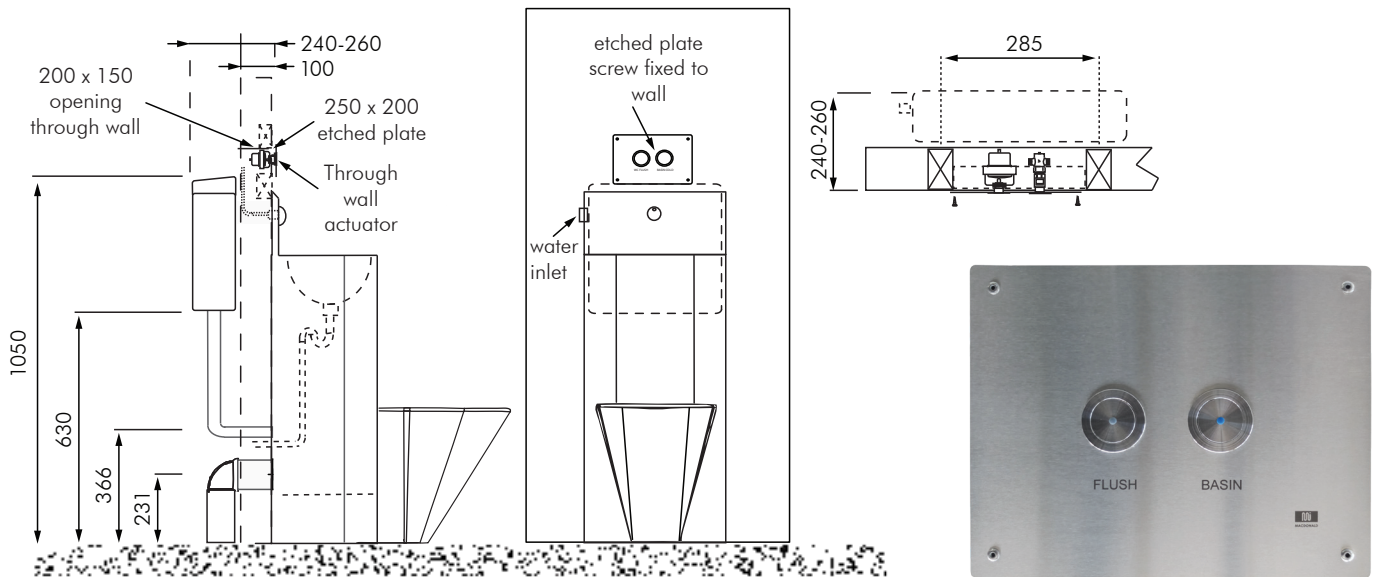

DESCRIPTION

This is an in wall cistern combined with a Delabie timed flow valve. It offers a plumbing option for Franke combi units where flushing and only cold water is required. Ideal for use with limited water supply pipes where flush valves are not an option.

- Supplied with robust stainless steel push button assembly, which is screw fixed to the wall above the combi and basin bubbler.
- Supplied in a 6L capacity and only available as a single full flush.
- Pressing the BASIN button initiates a timed flow of water from the bubbler for 7 seconds.

INSTALLATION

Full duct access must be available for servicing purposes. This is designed to be fitted in a duct directly behind the WC. Wall thickness up to 200mm can be accommodated however as per diagram (see above), it is valid only for

walls up to 100mm thick where the button/valve assembly is positioned inside wall framing.

It is only suitable for use with a Franke combi unit Model FRCM1 or FRCM2. The cistern should be secured to the inside of the wall. Nogging of wall may be necessary to offer the correct support.

The face panel is screwed to the face wall and similarly, the wall should be nogged to suit a position that allows face panel clearance of the combi backslash.

MODELS

- WS7790PO - As described above.
- WS7790PO-SP1 - To suit mounting on 200mm block wall with duct behind (refer separate information).