
## **Z-6000L-BV, Z-6000L-BD, Z-6000L-ST** EXPOSED RETROFIT TOILET FLUSH VALVES



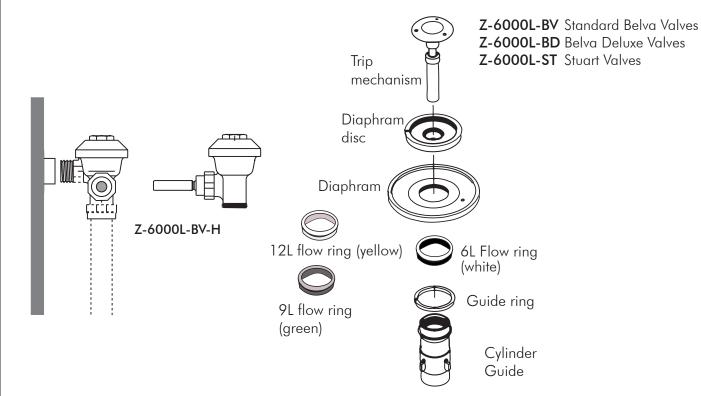

## **INSTALLATION**

Each valve is supplied with an adaptor fitted to the water inlet that allows direct connection to the socket(wingback) in the wall. The length and diameter of the adpator varies depending on the model and no further adjustment should be necessary. Where a Stuart valve is being replaced and the existing isolator is still required, it may be necessary to fit an M/F socket behind the isolator to space the new Zurn valve off the wall slightly as the original valve is smaller diameter.

The tailpiece of the Zurn valve is machined to accept 40mm copper so the existing flush pipes should reconnect to the new valve body without major alteration. Flush pipe kits can be supplied at extra cost if preferred. Specify Model ZL-FPK.

The Zurn flush valve is a diaphram operated push button actuated valve. It requires a minimum of 2.5m of head towork correctly and it is supplied with a diaphram kit that

will flush approximately 6L of water. Optional flow rings that will flush 9 or 12L are supplied and can be installed by the plumber if the standard flush volume is not suitable for the installed WC pan. Where only very low heads of water are available it may be necessary to remove the guide ring on the diaphram assembly to improve flow.

Z-6000L-BV valves also suit Hush Flush and Tanner valve replacement however the flush pipe must be replaced in these cases.

## **MODELS:**

Z-6000L-BV - Std Belva replacement - push button.
Z-6000L-BD - Deluxe Belva replacement - push button.
Z-6000L-ST - Stuart replacement - push button.

All valves also available with side mounted toggle Example specification: Z-6000L-BV-H.



## **Auckland (Head Office)**

20 Carr Rd, Three Kings Auckland 1041 **P**: 09 624 1115 **F**: 09 624 1110

E: sales@macdonaldindustries.co.nz

Wellington

Christchurch

**P**: 04 569 8033 **F**: 04 569 8066

**P**: 03 348 2356 **F**: 03 348 2376