


# DE20871T1

## BIOCLIP

### ELECTRONIC BASIN MIXER

**DELABIE**

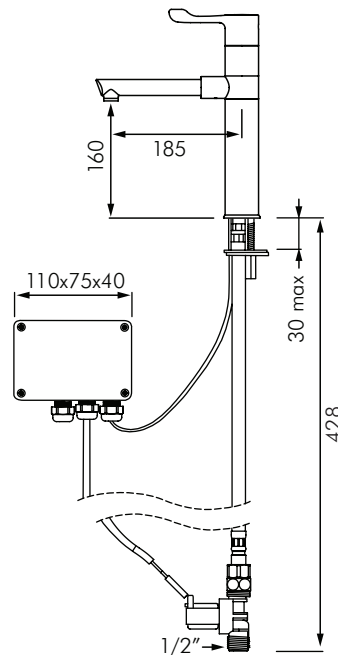

#### DESCRIPTION

DELABIE DE20871T1 is an electronic sink/basin mixer with removable, swivel spout. Supplied with independent IP65 electronic control unit and shock-proof infrared sensor. Available as 230/12V mains supply with transformer. Anti-bacterial duty flush operates for ~60 seconds every 24 hours after last use. Flow rate is limited to 7L/min at 300kPa. Operating pressure is 100-500kPa, 300kPa is recommended. Supplied with one disposable Hostaform spout L.181mm or two removable chrome-plated stainless steel spout L.185mm for wall mounting with hygienic scale-resistant flow straightener. Chrome-plated solid brass body and spout with smooth interiors (limits bacterial niches), hygienic scale-resistant flow straightener and reinforced fixing. Biofil sterile filter also available for this tap, see separate BIOFIL information.

Two shut off modes; 1) Standard mode: timed flow with automatic shut off; 2) On/Off mode: user shuts off voluntarily or automatic shut off after 30 minutes.

Supplied with PEX flexible connectors, solenoid valves, filters and M1/2" connections.

#### INSTALLATION

- Basin mounted connection M1/2".
- Maximum Hot water temperature 55°C.
- 230V power supply to control box by others.
- Solenoid and spout connect to 1/2" water supply.
- Flow rate limited to 7L/min at 300kPa.
- Different spout options; 1x disposable Hostaform spout, 2x chrome plated stainless steel removable spouts, 1x BIOFIL sterile filter spout.

#### MODELS

- DE20871T1** - Standard model 5L/min with disposable spout - 6 star WELS rating.
- DE20870T1** - Same as DE20871T1 but with 2 removable BIOCLIP spouts.
- DE20871T3** - Same as DE20871T1 but with H.300mm spout.
- DE20870T3** - Same as DE20871T3 but with 2 removable BIOCLIP spouts.