


## DE2436 SECURITOUCH WALL MOUNTED BASIN MIXER

**DELABIE**

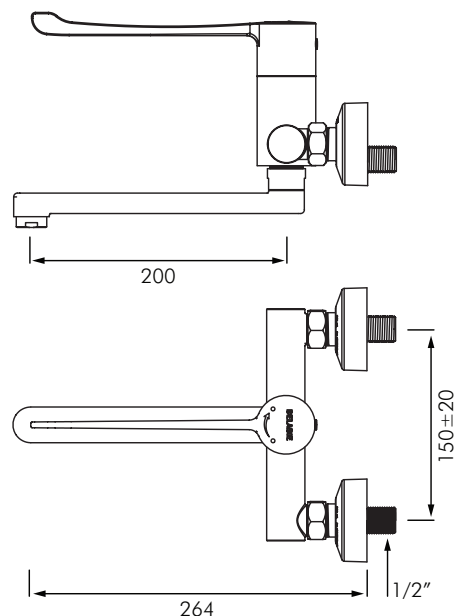

### DESCRIPTION

The Delabie DE2436 is a wall-mounted 90° sequential sink mixer. This mixer opens and closes on cold water preventing shock/scalding by the user.

Flat swivelling under spout L. 200mm with hygienic flow straightener reduces both biofilm from developing and water retention and is suitable for fitting a BIOFIL terminal filter.

Securitouch thermal insulation prevents burns. Ø 35mm ceramic cartridge with pre-set maximum temperature limiter. Body and spout with smooth interiors and low water volume (reduces bacterial development).

Flow rate limited to 6 lpm at 3 bar. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated brass body. Non-manual contact operation with Hygiene control lever L. 200mm.

Supplied with 2 offset STOP/CHECK connectors M1/2" M3/4" ideal for hospitals.

### INSTALLATION

- Wall mounted M1/2" connections 150mm centres.
- Supplied with offset stop/check connectors.
- Hygienic lever L.200mm.
- Ø 35mm ceramic cartridge.
- Flow rate 6L/min at 300kPa, operating pressure is 100-500kPa.
- Flat, swivel under spout L.200mm with hygienic flow straightener.

### MODELS

DE2436 - Standard model 6L/min.

#### Auckland (Head Office)

20 Carr Rd, Three Kings  
Auckland 1042  
09 624 1115  
sales@macdonaldindustries.co.nz  
macdonaldindustries.co.nz

#### Christchurch

32B Hayton Road  
Wigram, Christchurch  
03 348 2356  
christchurch@macdonaldindustries.co.nz

#### Wellington

04 569 8033