


# DE379ENC

## BINOPTIC WALL MOUNTED ELECTRONIC BASIN TAP

# DELABIE

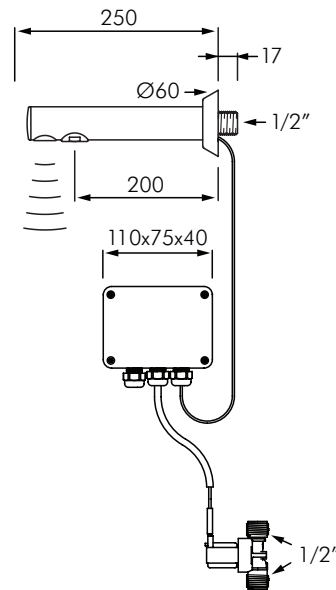

### DESCRIPTION

DELABIE DE379ENC is a wall mounted electronic basin tap with independent IP65 electronic control unit and shock-proof infrared presence detection sensor at the end of the spout. Available as 230/12V mains supply with transformer. Anti-bacterial duty flush operates for ~60 seconds every 24 hours after last use. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated brass body and spout L.200mm for wall mounting with hygienic scale-resistant flow straightener. Spout has a smooth interior and low volume of water (limits bacterial niches).

Supplied with M1/2" solenoid valve and filter.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

### INSTALLATION

- Wall mounted connection M1/2".
- Maximum Hot water temperature 55°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly on the flow straightener.
- Ensure basin waste position does not conflict with position of tap sensor. Minimum distance above basin top is 150mm.

### MODELS

**DE379ENC** - Standard model 3L/min - 6 star WELS rating.

**DE379DER** - Same as DE379ENC but through wall version for  $\leq 190$ mm wall.



**MACDONALD  
INDUSTRIES LIMITED**

#### Auckland (Head Office)

20 Carr Rd, Three Kings  
Auckland 1042  
09 624 1115  
sales@macdonaldindustries.co.nz  
macdonaldindustries.co.nz

#### Christchurch

32B Hayton Road  
Wigram, Christchurch  
03 348 2356  
christchurch@macdonaldindustries.co.nz

#### Wellington

04 569 8033