MACDONALD INDUSTRIES LIMITED TECHNICAL DATA SHEET

DE64000 Shower head with grid


DELABIE





Delabie DE64000 is a vandal proof fixed shower head with 5 ring spray grid. Flow rate 40L/min at 300kPa without flow rate regulator (can be combined with one of our flow regulators, see MODELS). Chrome plated solid brass with invisible anti-rotating blocking screw. Inlet connection M1/2".

Ideal for use in applications such as schools, sports stadiums, public bathrooms. Not recommended for use in high secuirty or mental health applications.

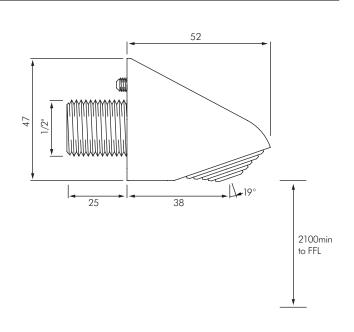

INSTALLATION

- M1/2" water supply connection.
- Fixed with invisible blocking screw.
- Flow rate 40L/min at 300kPa.

MODELS

DE64000 - Standard model 40L/min, see shower mixer/valve for actual flow rate.
DE64200 - Same as DE64000 but to suit through wall mounting 200mm.
DE927005 - Flow rate regulator 5L/min at 300kPa.
DE927015 - Flow rate regulator 10L/min at 300kPa.



Auckland (Head Office)

20 Carr Rd, Three Kings Auckland 1042 09 624 1115 sales@macdonaldindustries.co.nz macdonaldindustries.co.nz

Christchurch

32B Hayton Road Wigram, Christchurch 03 348 2356 christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033