


DE734100
TEMPOGENOU
KNEE OPERATED VALVE TIME FLOW VALVE

DELABIE

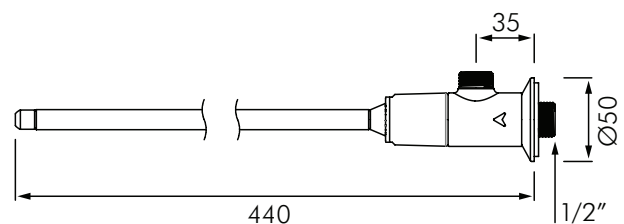

DESCRIPTION

DELABIE DE734100 is a knee operated time flow basin valve for cold or mixed water supply. Time flow is ~7 seconds. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body and wall plate. Angled M1/2" water connections.

We recommend installing a thermostatic mixing valve (see Water Tempering section) and a wall or basin mounted spout (see Spouts section).

INSTALLATION

- Time flow ~7 seconds.
- Control lever reinforced by an internal stainless steel rod.
- M1/2" right angle water connections.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min.

MODELS

DE734100 - Standard model 3L/min - 6 star WELS rating.