
MACDONALD INDUSTRIES LIMITED TECHNICAL DATA SHEET

DE741500 TEMPOSOFT 2 TIME FLOW BIB TAP

DELABIE



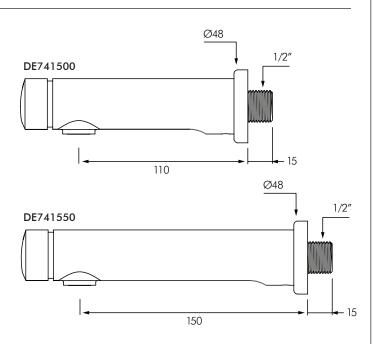

DESCRIPTION

DELABIE DE741500 is a wall mounted time flow basin tap with a soft touch operation. Soft touch operation allows users to press the control with no effort especially children, elderly or people with reduced physical ability. Time flow is \sim 7 seconds. Flow rate is pre-set at 3L/min at 300kPa. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with tamperproof scale-resistant flow straightener and M1/2" fixing.

Supplied with red and blue indicators.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Wall mounted connection M1/2".
- M1/2" water supply connection.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, adjustable.

MODEL

- **DE741500** Standard model 3L/min 6 star WELS rating.
- DE741550 Same as DE741500 but with L.150 spout.





Auckland (Head Office)

20 Carr Rd, Three Kings Auckland 1042 09 624 1115 sales@macdonaldindustries.co.nz macdonaldindustries.co.nz

Christchurch

32B Hayton Road Wigram, Christchurch 03 348 2356 christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033