


DE749428
TEMPOSOFT 2
TIME FLOW SHOWER VALVE

DELABIE

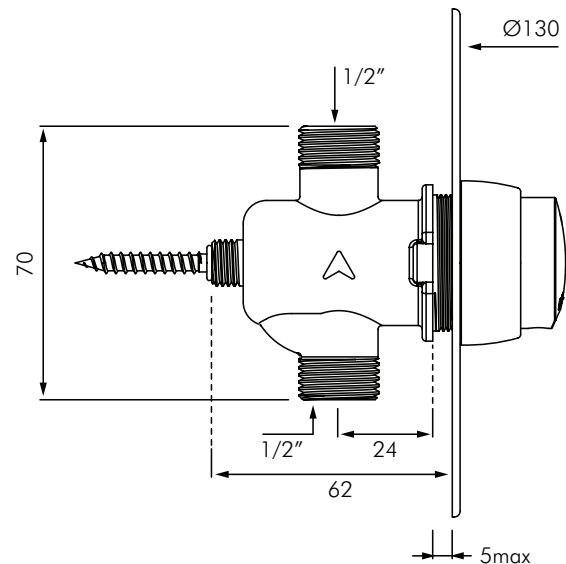

DESCRIPTION

DELABIE DE749428 is a recessed mounted time flow shower valve with a soft touch operation. Soft touch operation allows users to press the control with no effort especially children, elderly or people with reduced physical ability. Time flow is ~30 seconds. Flow rate is pre-set at 9L/min at 300kPa, can be adjusted. When connected to a Delabie shower rose the actual flow rate will be 6L/min, 3 star WELS rating. Operating pressure is 100-500kPa, 300kPa is recommended. Bright polished stainless steel wall plate Ø130mm with solid brass body. M1/2" water connections for mixed water supply.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Recessed mounted behind Ø130mm stainless steel cover plate.
- M1/2" water supply connection.
- Recessed depth can be adjusted from 1 to 5mm.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 9L/min at 300kPa, can be adjusted.

MODELS

DE749428 - Standard model 9L/min - 2 star WELS rating.