


DE790310 TEMPOMIX SHOWER PANEL

DELABIE

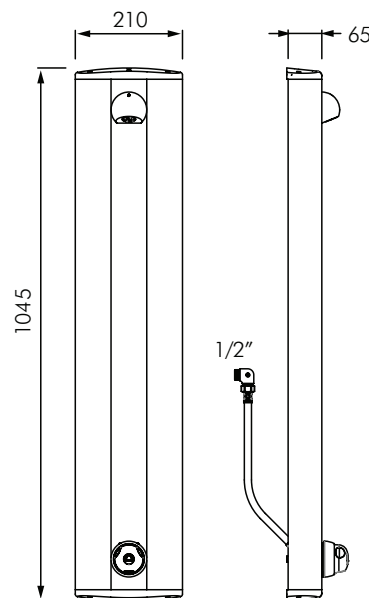

DESCRIPTION

DELABIE DE790310 is a time flow shower panel with fixed shower head. Aluminium epoxy coated shower panel for surface mounting. Temperature control and operation on the push button with adjustable maximum temperature limiter. Concealed water inlets via flexible connections. Chrome plated Round shower head, tamperproof with scale resistant outlet and automatic flow regulator. Adjustable spray angle can be locked in place. Time flow ~30 seconds with soft touch operation. Flow rate 6L/min at 300kPa. Operating pressure 100-500kPa, 300kPa is recommended.

Supplied with non-return valves, filters, fixings and M1/2" connections for water supply.

INSTALLATION

- Surface mounted shower panel with soft touch operation and tamperproof shower head.
- Concealed inlets via flexible M1/2" connections.
- Panel screw fixes to wall in position to achieve desired height.
- Flow rate 6L/min at 300kPa.
- Operating water pressure 100-500kPa.
- Adjustable spray angle can be locked in place.

MODELS

DE790310 - Standard model 6L/min
3 star WELS rating.

DE790300 - Same as DE790310 but with top inlets
3 star WELS rating.

Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033