MACDONALD INDUSTRIES LIMITED TECHNICAL DATA SHEET

AS20199 ROVAL SEMI RECESSED HIGH SPEED HAND DRYER






DESCRIPTION

The ASI Roval AS20199 hand drier is a fully automatic semi recess mounted, sensor activated drier suitable for installation in any commercial bathroom, where good looks and fast drying time are required.

With a high delivery fan, AS20199 will dry hands in approximately 15 seconds. Because of this there is a higher than normal noise level.

The main body is 1.0mm powder coated steel with a 1.2mm Type 304 stainless steel 1 piece pressed (curved) front cover offering additional strength and superior finish. Cover is fixed to main body using concealed pin-hex security screws.

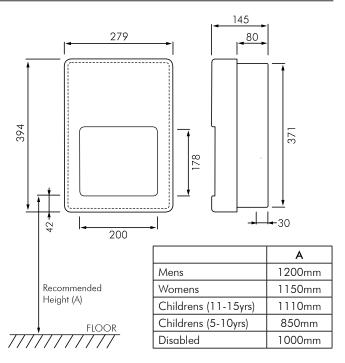

INSTALLATION

Drier is designed to be recessed into wall cavity according to Rough Wall Opening (below).

Fix to wall as per dimensions (above) using 4 x M5 screws (by others) or masonary anchors if applicable.

Rough Wall Opening: 267W x 384H x 83D

Electrician to supply power via optional knockouts in main body as shown on drawing, all according to installation instructions supplied with each drier.

SPECIFICATION

230V AC 50hZ 20A Element: 1000W Motor: 500W Airflow: 102m³/hr IP Rating: X1 Auto cutout after 60 sec. continuous use

MODELS

AS20199 - Standard model as shown.



Auckland (Head Office)

20 Carr Rd, Three Kings Auckland 1041 P: 09 624 1115 F: 09 624 1110 E: sales@macdonaldindustries.co.nz Wellington P: 04 569 8033 F: 04 569 8066 **Christchurch P**: 03 348 2356 **F**: 03 348 2376

www.macdonaldindustries.co.nz