


DE735400AS

TEMPOGENOU KNEE OPERATED TIME FLOW VALVE - LEAD FREE*

DELABIE

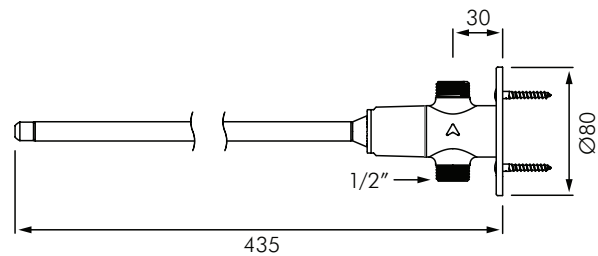

DESCRIPTION

Delabie DE735400AS is a knee-operated time flow valve for cold or tempered water supply. Time flow is ~7 seconds. Operation is by pushing the reinforced control lever with the user's knee. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with solid brass wall plate with reinforced fixing via 4 stainless steel screws. Straight M1/2" in-line water connections.

We recommend installing a thermostatic mixing valve (see Water Tempering section) and a wall or basin mounted spout (see Spouts section).

INSTALLATION

- Hands-free operation, total hygiene.
- Chrome-plated brass wall plate with reinforced fixings.
- Exceptional water savings ~85%.
- Control lever length L.435mm from wall.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, adjustable 1.4-6L/min.

MODELS

DE735400AS - Delabie Tempogenou Time Flow Knee-Operated Valve.

*'Lead free' has been defined as a plumbing product or material in contact with potable water that has a weighted average lead content of no more than 0.25%.



Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033