


DE794000AS
TEMPOMIX 3 TIME FLOW BASIN MIXER
- LEAD FREE*

DELABIE

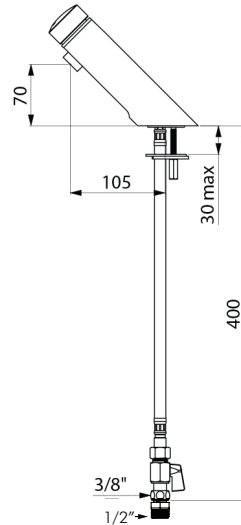

DESCRIPTION

Delabie DE794000AS is a deck mounted time flow basin mixer with soft-touch operation. Soft-touch operation allows users to press the control to open the tap with no effort, especially for children, elderly, or people with reduced physical ability. Temperature control and operation is on the push button. Time flow is ~7 seconds, adjustable from 6-9 seconds. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 3-6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with scale-resistant flow straightener and M1/2" connections.

INSTALLATION

- Deck mounted through Ø34mm hole, with reinforced fixings.
- Exceptional water savings ~85%
- Soft-touch activation.
- Spout length L.105mm.
- 365mm PEX flexible 3/8" connector, supplied with 3/8" isolators and 3/8-1/2" adaptor.
- Maximum HW inlet temperature 70°C, we recommend ≤45°C to avoid scalding.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min.
- Check compatibility of basin with this tap; the elongated base of tap may conflict with any basin that has a raised lip at the back.

MODELS

DE794000AS - Delabie Tempomix 3 Time Flow Basin Mixer, Includes 2x Stopcocks.

*'Lead free' has been defined as a plumbing product or material in contact with potable water that has a weighted average lead content of no more than 0.25%.



Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033