


ZH-6152XL-PO

TOILET FLUSH VALVE AND BASIN VALVE SET TO SUIT INSTALLATION WITH FRANKE COMBI

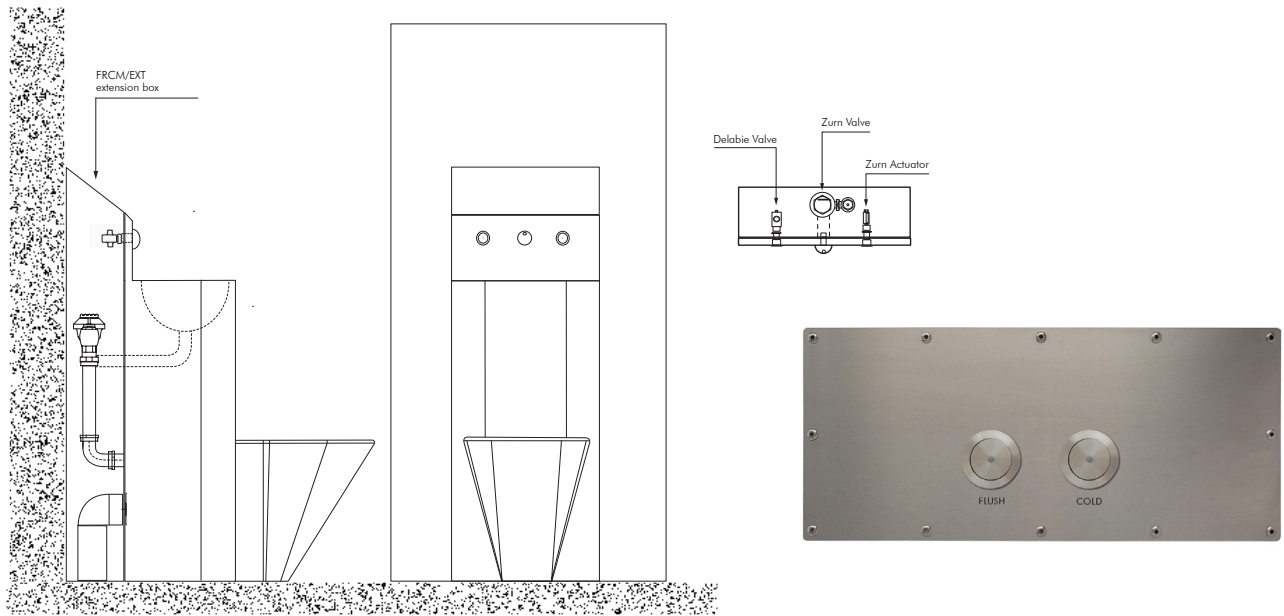

DESCRIPTION

ZH-6152XL-PO is a combination mains pressure flushing valve and Delabie timed flow basin valve set, specifically designed to mount through the backsplash of a Franke combi unit providing a vandal resistant means of WC flushing and cold water supply to the basin. The flush valve is pre-set to deliver a 6L flush and has achieved the distinction of Australian Standards Watermark approval and WELS 1 Star rating. Valve upgradable to 4.5L flushing should regulations permit.

Pipework design is critical to correct valve operation and must be completed by a suitably qualified person.

The set can be purchased in a format to suit mounting inside the combi extension box, if there is no duct access behind the combi, as per the drawing above. Alternatively, if there is duct access behind the combi it can be supplied with extensions allowing through wall fixing.

The set includes the Zurn flush valve, Delabie timed flow basin valve, through wall connectors, bubbler for the basin and a set of John Guest fittings allowing connection between the Delabie valve and the bubbler.

SPECIFICATION

Flush Valve: Suitable for connection to 6 litre back entry pans.
Minimum Pressure: 150kPa
Maximum Pressure: 500kPa
Flow Rate: 90L/min
Inlet Connection: 25mm BSP
Flush Volume: 6L

MODELS

ZH-6152XL-PO-03 - To suit installation within a combi extension box where no duct space is available.
ZH-6152XL-PO-10 - To suit through wall mounting (~100mm) where there is a duct behind the combi.
ZH-6152XL-PO-15 - To suit through wall mounting (~150mm) where there is a duct behind the combi.
ZH-6152XL-PO-20 - To suit through wall mounting (~200mm) where there is a duct behind the combi.

